

1M Series

Miniature Toggle Switches



SPECIFICATIONS

CONTACT RATING: Dependent upon contact material See page 11.

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -40°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).

ACTUATOR: Brass, chrome plated.

BUSHING: Brass, nickel plated.

HOUSING: Stainless steel.

SWITCH SUPPORT: Brass, tin plated.

CONTACT / TERMINALS: Copper alloy, Silver or gold plated.
(See Page 11)



1M
Toggle Switches



HOW TO ORDER

MODEL NO.	ACTUATOR	BUSHING	TERMINATIONS	TERMINAL PLATING	SEAL	RoHS SOLDERING
<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> </div> Model NO. 1MS1 SP On-None-On 1MS2 SP On-None-Mom 1MS3 SP On-Off-On 1MS4 SP Mom-Off-Mom 1MS5 SP On-Off-Mom 1MD1 DP On-None-On 1MD2 DP On-None-Mom 1MD3 DP On-Off-On 1MD4 DP Mom-Off-Mom 1MD5 DP On-Off-Mom 1MD6 DP On-On-On 1MD7 DP Mom-On-Mom 1MD8 DP On-On-Mom 1M31 3P On-None-On 1M32 3P On-None-Mom 1M33 3P On-Off-On 1M34 3P Mom-Off-Mom. 1M35 3P On-Off-Mom 1M41 4P On-None-On 1M42 4P On-None-Mom 1M43 4P On-Off-On 1M44 4P Mom-Off-Mom 1M45 4P On-Off-Mom 1M46 4P On-On-On 1M47 4P Mom-On-Mom 1M48 4P On-On-Mom	Actuator T1 10.41 high T2 5.08 high T3 13.97 high T4 16.26 high T5 21.34 high T6 Flatted, anti-rotation 12.30 high T61 Flatted, anti-rotation 21.0 high T62 Lever handle with cap 13.49 high T63 Flatted, anti-rotation 6.35 high T7 12.37 high, 15/32 bushing T8 17.58 high, 15/32 bushing T88 17.5 high, 15/32 bushing T9 Plastic, 21.3 high TL1 Locking lever 16.00 high TL2 Locking lever 16.26 high TL3 Locking lever 17.28 high	Bushing B1 8.89 high, keyway (thd std) B2 8.89 high, keyway (non-thd) B3 7.10 high, keyway (thd) B4 7.10 high, keyway (non-thd) B5 7.52 high, flat (torque) B6 8.00 high, keyway (torque) B7 8.89 high, flat (thd std) B8 8.89 high, keyway (metric thd) B9 7.52 high, flat (splash proof) B11 7.55 high, keyway (thd std) B12 7.55 high, keyway (non-thd) B13 11.38 high, keyway (15/32 bushing) B14 11.90 high, flat (splash proof) B15 7.55 high, flat (thd std) B16 7.55 high, flat (non-thd) B17 3.50 high, keyway B18 11.38 high, keyway (15/32 bushing) B20 11.38 high, keyway (15/32 bushing) B25 8.00 high, keyway, locking lever (thd) B26 8.00 high, keyway, locking lever (non-thd) B52 11.70 high, flat (15/32 bushing)	Terminations M1 Solder lug M2 PC thru-hole M3 Quick connect M51 18.70 high, wire wrap M52 24.20 high, wire wrap M53 10.55 high, wire wrap M54 26.97 high, wire wrap M6 Right angle, PC thru-hole M6N Right angle, Snap-in, PC thru-hole M7 Vertical right angle, PC thru-hole VS2 11.68 high, V-bracket V2N 11.68 high, Snap-in. V-bracket VS3 16.00 high, V-bracket VS4 11.68 high, V-bracket VS5 16.00 high, V-bracket	Terminal plating Q Silver R Gold C Gold over silver	Seal E EPOXY (std) N NO EPOXY	RoHS soldering S RoHS & Lead Free

1M Series

Miniature Toggle Switches

SWITCH FUNCTION



1M
Toggle Switches

NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
			POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
SP	Q1111	1MS1	ON	NONE	ON		N/A	2-1
	Q1112	1MS2	ON	NONE	MOM			
	Q1113	1MS3	ON	OFF	ON			
	Q1114	1MS4	MOM	OFF	MOM			
	Q1115	1MS5	ON	OFF	MOM			
DP	Q1121	1MD1	ON	NONE	ON		N/A	2-1,5-4
	Q1122	1MD2	ON	NONE	MOM			
	Q1123	1MD3	ON	OFF	ON			
	Q1124	1MD4	MOM	OFF	MOM			
	Q1125	1MD5	ON	OFF	MOM			
	Q1126	1MD6	ON	ON	ON			
	▲ Q1127	1MD7	MOM	ON	MOM			
	▲ Q1128	1MD8	ON	ON	MOM			
3P	Q1131	1M31	ON	NONE	ON		N/A	2-1,5-4,8-7
	Q1132	1M32	ON	NONE	MOM			
	Q1133	1M33	ON	OFF	ON			
	Q1134	1M34	MOM	OFF	MOM			
	Q1135	1M35	ON	OFF	MOM			
4P	Q1141	1M41	ON	NONE	ON		N/A	2-1,5-4,8-7,11-10
	Q1142	1M42	ON	NONE	MOM			
	Q1143	1M43	ON	OFF	ON			
	Q1144	1M44	MOM	OFF	MOM			
	Q1145	1M45	ON	OFF	MOM			
	Q1146	1M46	ON	ON	ON			
	▲ Q1147	1M47	MOM	ON	MOM			
	▲ Q1148	1M48	ON	ON	MOM			


MOM= MOMENTARY

▲ Please check the availability in advance before order

POLE OPTIONS




1M
Toggle Switches

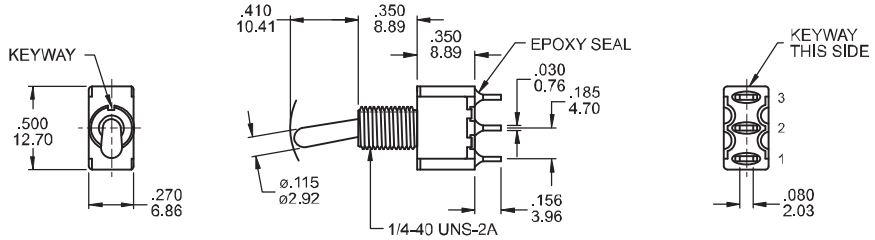


SPDT

Part No. Shown : 1MS1T1B1M1QES

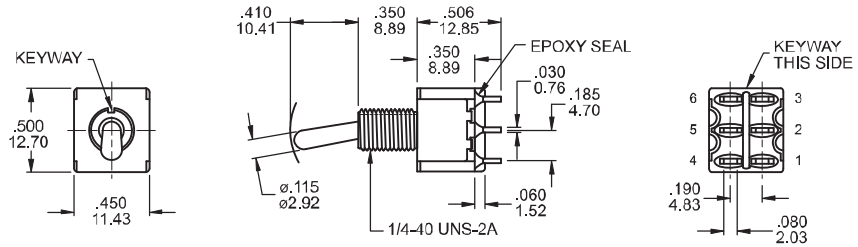


DPDT

Part No. Shown : 1MD1T1B1M1QES

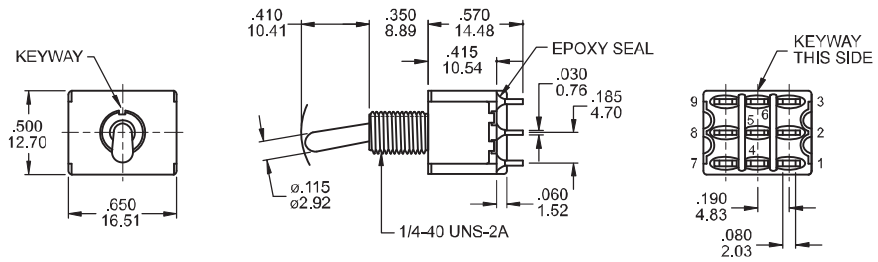

3PDT

Part No. Shown : 1M31T1B1M1QES

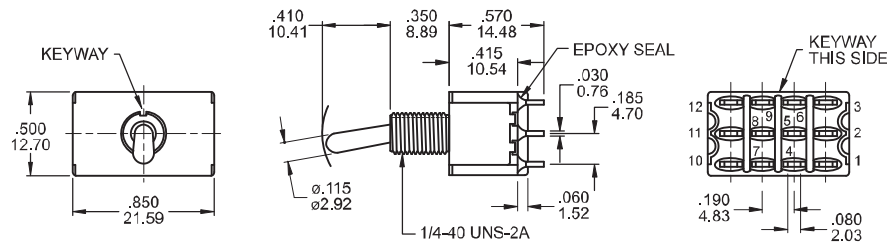

4PDT

Part No. Shown : 1M41T1B1M1QES

1M Series

Miniature Toggle Switches

3-WAY SWITCH


3-Way Wiring Diagram Schematics



1M
Toggle Switches


SINGLE POLE, 3 POSITION

Model No.	POS 1	POS 2	POS 3
1MD6	ON	ON	ON
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4

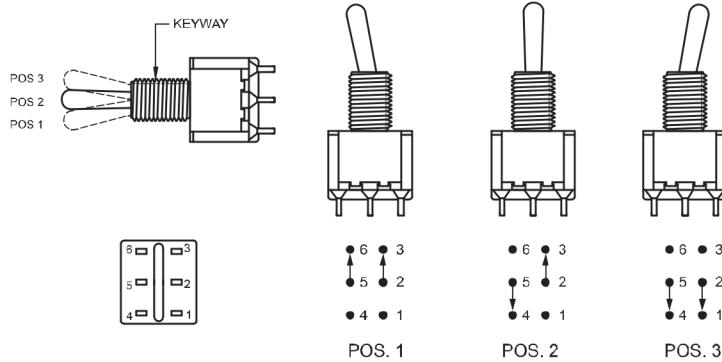


DOUBLE POLE, 3 POSITION

Model No.	POS 1	POS 2	POS 3
1M46	ON	ON	ON
Term. Comm.	2-3,5-6 8-9,11-12	2-3,5-4 8-9,11-10	2-1,5-4 8-7,11-10

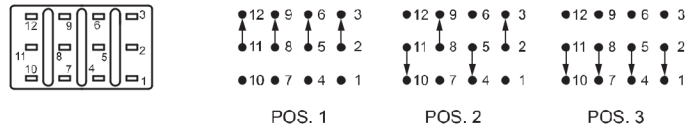


ACTUATOR OPTIONS


T1 STD




T2




T3



T4



T5



NOTE : T1 ~ T5 Actuator shown with standard B1 Bushing ;

Add .070 (1.78) for B3 Bushing ;




Subtract .020 (0.51) for B6 Bushing ;

Std for M1 , M2 Terminal sub .016 (0.40) for M6 , M7 , VSX (Exclude B1/B2 bushing)

T88B52

SPLASH PROOF

Std SPDT for M1,M2 Terminal

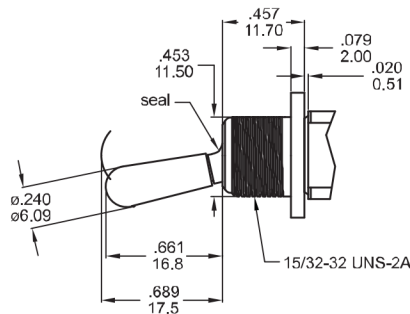


1M Series

Miniature Toggle Switches




1M
Toggle Switches


T6 FLATTED WITH ANTIROTATION




T61



T63



T62




Plastic No,Color :

ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

NOTE: T6,T61,T62 ,T63 use with B11, B12, B15, B16 bushing only.


* Besides standard color, other colors need to check stocks available.

T7




Use with B13 bushing
Use with B18,B20 the lever is antirotation and the size of lever is 13.00mm

T8

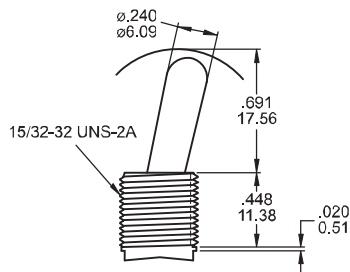


Use with B13 bushing
Use with B18,B20 the lever is antirotation and the size of lever is 18.00mm

T9




B1 / B2 bushing std with black(T92) and red(T93) color only(std.)



TL1B25 THD STD
B26 NON-THD

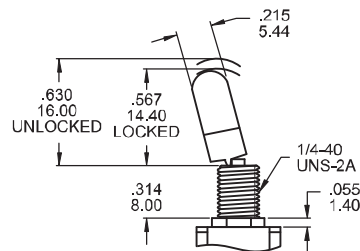

TL2B25 THD STD
B26 NON-THD

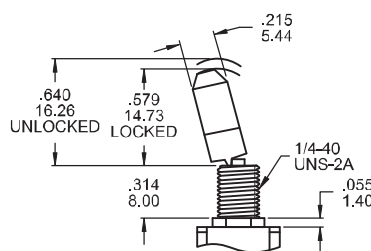

TL3B25 THD STD
B26 NON-THD

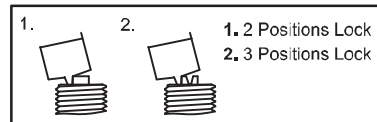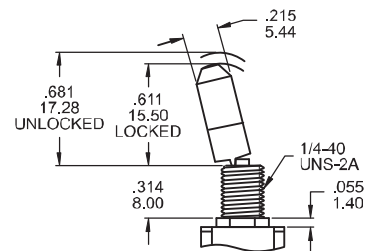

1M Series


Miniature Toggle Switches

BUSHING OPTIONS




1M
Toggle Switches

B1 THD STD
B2 NON-THD




Subtract .016 (0.40) for M6, M7 and VS2~5 termination options.

B3 THD
B4 NON-THD




B4 is standard for M6, M7 and VS2~5 termination options.


B5 HIGH TORQUE




B6 HIGH TORQUE





B7 THD STD




B8 METRIC THD




B9 SPLASH PROOF

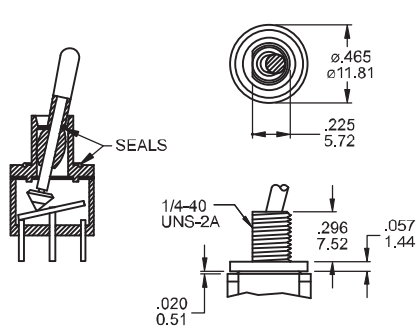

B11 THD STD
B12 NON-THD




B15 THD STD
B16 NON-THD




Use with T6 actuators only

B17



B13

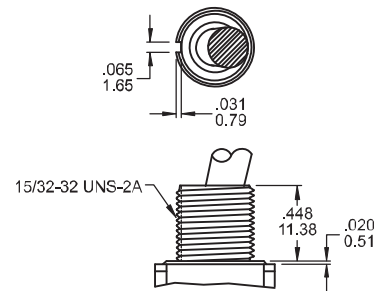


Use with T7, T8 actuators only
B13 Bear strength from top of actuator
up to 10kg aside up to 15kg

1M Series


Miniature Toggle Switches

B14 SPLASH PROOF

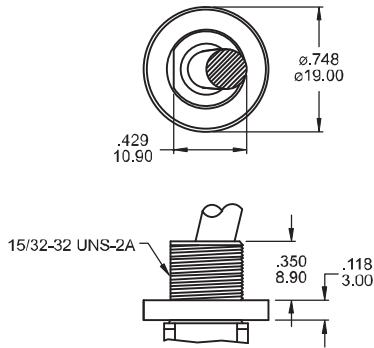


Use with T7, T8 actuators only

B18

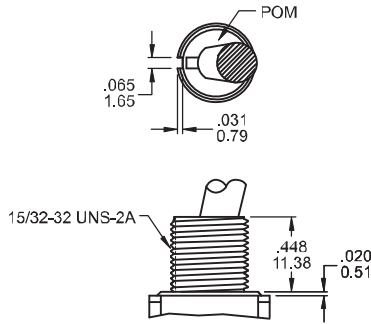

Use with T7, T8 and TA actuators only with Plastic (POM) Insert

B20

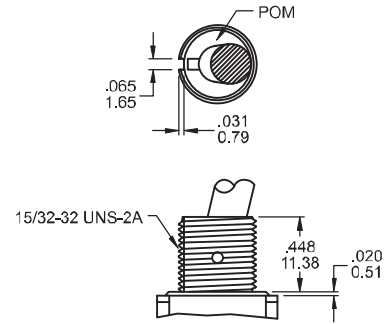

Use with T7, T8 and TA actuators only with Plastic (POM) Insert


B18, B20 Bear strength from top of actuator up to 20kg aside up to 15kg



1M
Toggle Switches

OPTIONAL TOGGLE CAP

CP-T1XX



Use with T1 actuator


CAP Color :

ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
5	Yellow
6	Green
7	Blue
9	Gray


* Besides standard color, other colors need to check stocks available.

PANEL MOUNTING


1/4 IN BUSHING



Without locking ring (Keyway)




Without locking ring (Flat)




With standard locking ring.

METRIC BUSHING




Without locking ring (Keyway)




With standard locking ring.

15/32 IN BUSHING




Without locking ring (Keyway)



With standard locking ring.

SPLASH PROOF BUSHING



Without locking ring (Flat)

1M Series


Miniature Toggle Switches




1M
Toggle Switches

TERMINATION OPTIONS


M1 Solder lug




M2 PC Thru-hole



M3 Quick connect



M5 Wire Wrap



OTHER TERMINATION OPTIONS

M6 Right angle P.C. Mount

M7 Vertical right angle P.C. Mount

VS2 Vertical bracket P.C. Mount

VS3 Vertical bracket P.C. Mount


VS5 Vertical bracket P.C. Mount

M6N Right angle P.C. Mount with snap-in bracket


V2N Vertical bracket P.C. Mount with snap-in bracket

OPTION CODE	DIM. 'A'
M51	.736 (18.70)
M52	.953 (24.20)
M53	.415 (10.55)
M54	1.062 (26.97)

M6

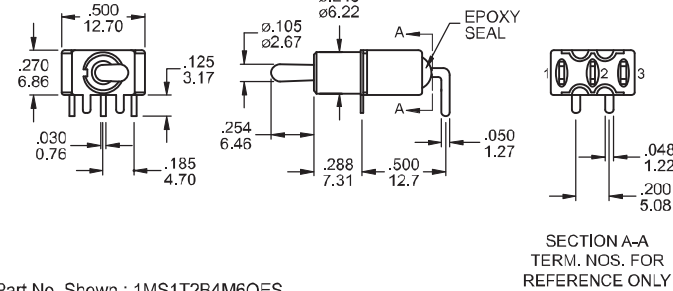


P.C. MOUNTING




SPDT

Part No. Shown : 1MS1T2B4M6QES

M6

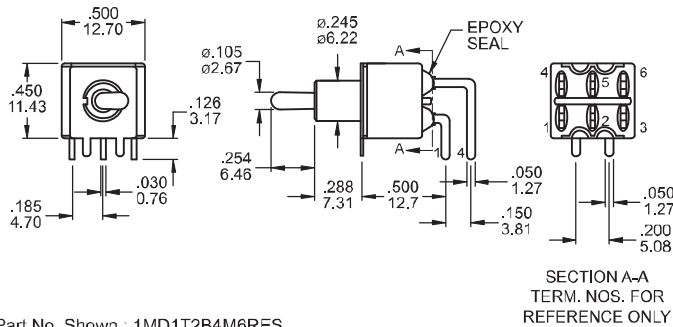


P.C. MOUNTING




DPDT

Part No. Shown : 1MD1T2B4M6RES

M7

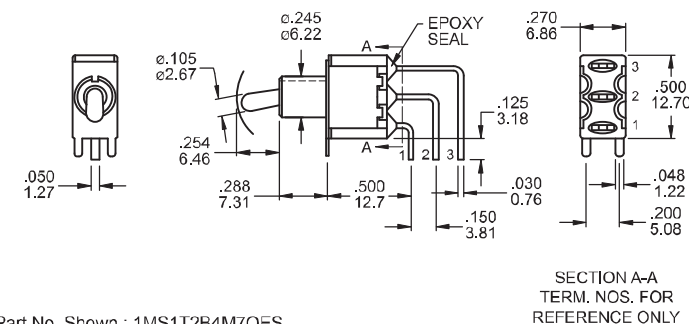

P.C. MOUNTING



SPDT

Part No. Shown : 1MS1T2B4M7QES


1M Series

Miniature Toggle Switches




1M
Toggle Switches

M7

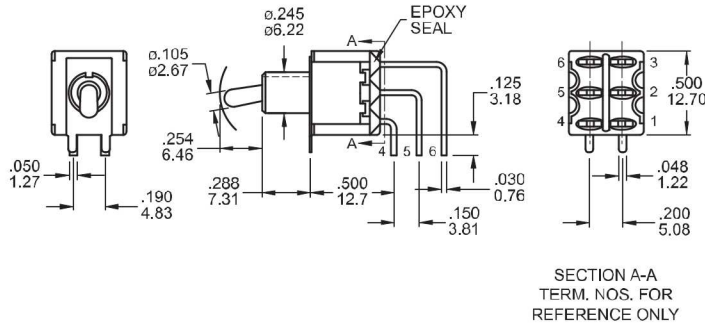


P.C. MOUNTING




Part No. Shown : 1MD1T2B4M7QES

M7

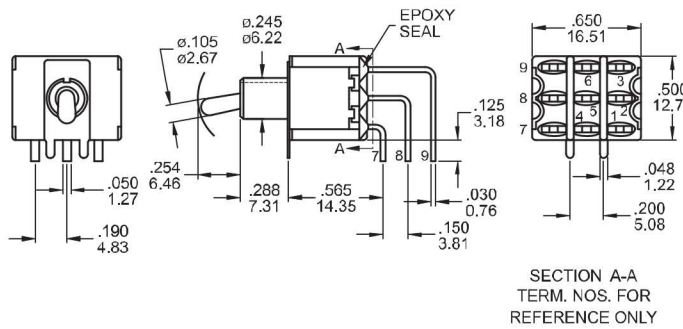


P.C. MOUNTING




Part No. Shown : 1M31T2B4M7QES

3PDT

M7

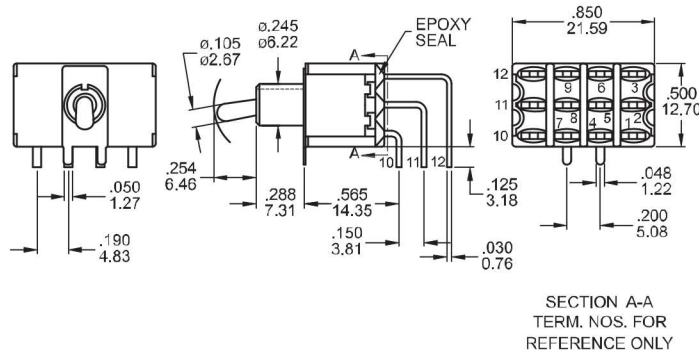


P.C. MOUNTING




Part No. Shown : 1M41T2B4M7QES

4PDT

VS2 - VS3

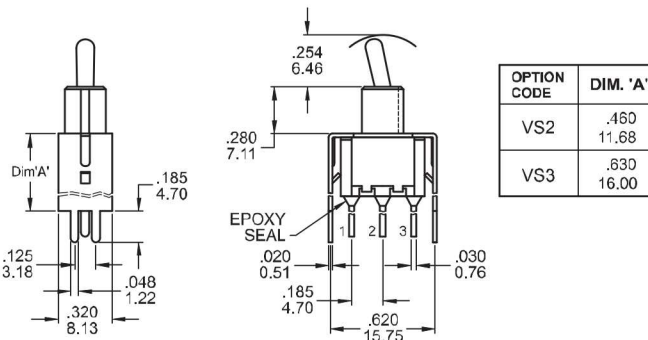

P.C. MOUNTING



Part No. Shown : 1MS1T2B4VS2QES

SPDT


1M Series

Miniature Toggle Switches




1M
Toggle Switches

VS2 - VS3

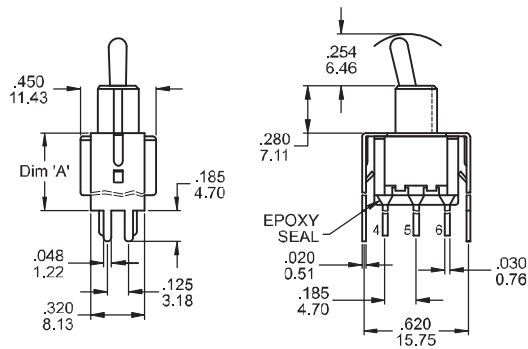

OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00


P.C. MOUNTING



DPDT


Part No. Shown : 1MD1T2B4VS3QES

VS5

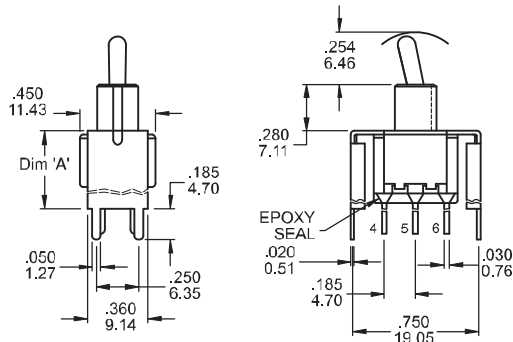

OPTION CODE	DIM. 'A'
VS4	.460 11.68
VS5	.630 16.00

P.C. MOUNTING




DPDT


Part No. Shown : 1MD1T2B4VS5QES

SNAP-IN TERMINATION OPTIONS

M6N




V2N




HARDWARE

1/4 NUT




Supplied standard with B1, B3, B5, B6 and B9 options

DRESS NUT




METRIC NUT



Supplied standard with B8 metric bushing

LOCKWASHER



Supplied standard with B1 / B3 bushing


1M Series

Miniature Toggle Switches



1M
Toggle Switches


LOCKING RING



MNU-1M02

Locking ring supplied standard


LOCKING RING



MNU-1M11

Locking ring supplied with B5 bushing


LOCKING RING



MNU-1M08

Locking ring supplied with B13, B18, B20 bushing


LOCKING RING



MNU-1M05

Locking ring supplied with B8 bushing


15/32 NUT



MNU1M07

Supplied standard with B13 bushing


LOCKWASHER



MNU-1M09


Supplied standard with B13 bushing

OPTIONAL RUBBER HOOD SEALING




K1=Metric
E1=Inch (Std.)
for actuator T1, T2 and
B1, B3, B5, B6 Bushing only

DRESS NUT



MNU-1M18

DRESS NUT



MNU-1M24

CONTACT MATERIAL OPTIONS

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Q = Silver	5 Amps with resistant load @ 120VAC or 28VDC
C	Gold over Silver	C = Gold over silver	2 Amps with resistant load @ 250VAC
R	Gold	R = Gold	0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)

SOLDERING PROCESSES

MANUAL SOLDERING: Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

WAVE SOLDERING: Recommended Soldering Temperature: 270 ± 5°C

Duration of Solder Immersion: Max 5 sec. (PCB is 1.6mm in thickness)